

## SENATE INQUIRY

### IMPACTS ON HEALTH OF AIR QUALITY IN AUSTRALIA

#### Response from North Queensland Bulk Ports Corporation (NQBPC) to a Question on Notice

**Question from Senator Waters (p41 of Hansard of 11 June 2013): “Can you clarify for me precisely how many kilometres away from the port operations each of those (dust monitoring) sites are. Perhaps you could take that on notice. ”**

**Response from Mr Stewart-Harris: “We are happy to provide a map of that to show the distances.”**

#### **NQBPC Response:**


Two maps have been prepared by NQBPC to answer this enquiry and these are attached:

1. Map of the dust monitoring sites around the existing coal terminals in the Port and in the surrounding communities. This monitoring program is funded through a joint program between NQBPC and the operators of the two terminals. The monitoring is undertaken through an independent environmental consultant and the results are reported monthly on NQBPC’s website at: <http://www.nqbp.com.au/hay-point/>

The legend of the attached map provides the distance of each of the five continuous dust monitoring stations, which are located in communities around the Port of Hay Point, from the closest terminal boundary. The type of dust monitor (Total Suspended Particulates or TSP, PM10 or PM 2.5) at each location is indicated on the map.

2. Map showing the location of the dust monitoring station operated at West Mackay by the Department of Environment & Heritage Protection and its distance from the coal terminals

Prepared by R. Brunner, General Manager Planning – Hay Point  
B.E. (Chem), M. Eng. St, M.Sc. Env. Man., M. I. Chem. E

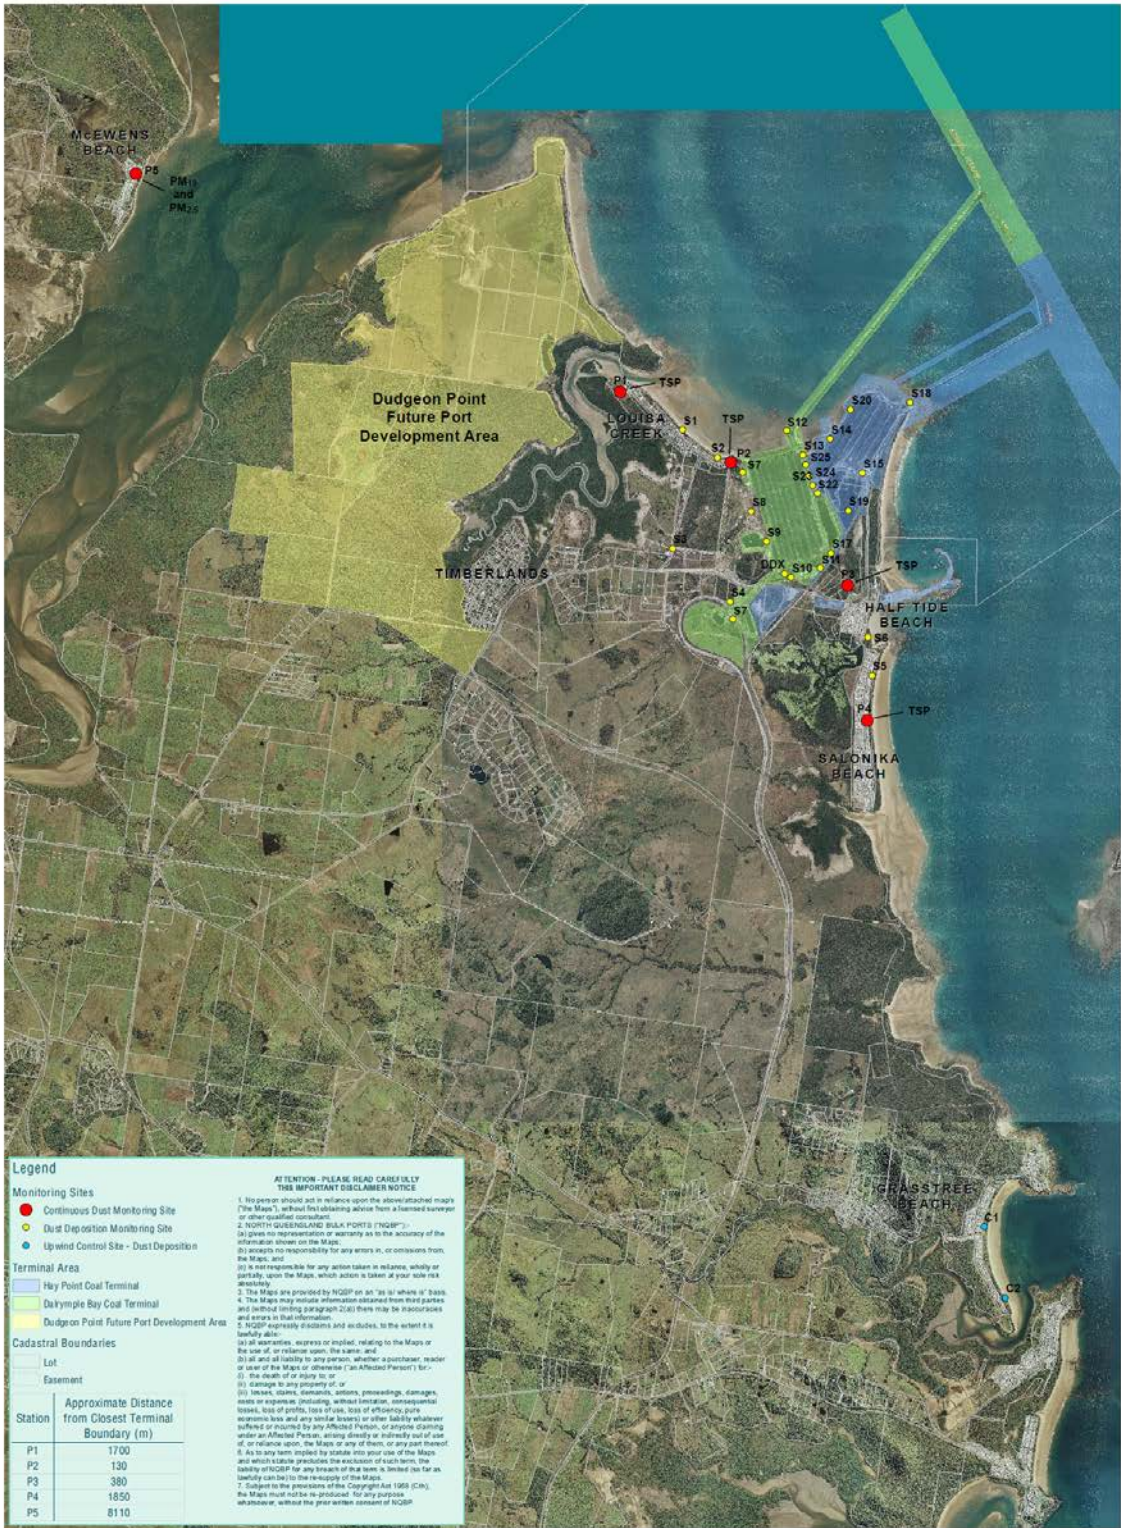

**Legend**

**Monitoring Sites**

- Continuous Dust Monitoring Site
- Dust Deposition Monitoring Site
- Upwind Control Site - Dust Deposition

**Terminal Area**

- Hay Point Coal Terminal
- Darymple Bay Coal Terminal
- Dudgeon Point Future Port Development Area


**Cadastral Boundaries**

- Lot
- Easement

Station	Approximate Distance from Closest Terminal Boundary (m)
P1	1700
P2	130
P3	380
P4	1850
P5	8110


**ATENTION - PLEASE READ CAREFULLY THIS IMPORTANT DISCLAIMER NOTICE**

- No person should act in reliance upon the above attached maps ("the Maps"), without first obtaining advice from a licensed surveyor or other qualified consultant.
- NORTH QUEENSLAND BULK PORTS ("NQBPP")** gives no representation or warranty as to the accuracy of the information shown on the Maps.
- NQBPP is not responsible for any errors in, or omissions from, the Maps, and:
- is not responsible for any action taken in reliance, wholly or partially, upon the Maps, which action is taken at your sole risk and liability.
- The Maps are provided by NQBPP on an "as is" where it" basis.
- The Maps may contain information obtained from third parties and (without limiting paragraph 2(a)) there may be inaccuracies and errors in that information.
- NQBPP expressly disclaims and excludes, to the extent it is lawfully able:
  - all warranties, express or implied, relating to the Maps or the use of or reliance upon, the same; and
  - all and all liability to any person, whether a purchaser, reader or user of the Maps or otherwise ("an Affected Person") for:
    - the death of or injury to;
    - damage to any property of;
    - loss of, or damage to, business, contracts, actions, proceedings, damages, fees or expenses (including, without limitation, consequential losses, loss of profits, loss of use, loss of efficiency, pure economic loss and any similar losses) or other liability whatever suffered or incurred by any Affected Person, or anyone claiming under an Affected Person, arising directly or indirectly out of use of or reliance upon, the Maps or any of them; or any part thereof.
- As to any term implied by statute into your use of the Maps and which shall preclude the exclusion of such term, the liability of NQBPP for any breach of that term is limited (so far as liability can lawfully be limited) to the redrafting of the Maps.
- Subject to the provisions of the Copyright Act 1969 (Cth), the Maps must not be reproduced, for any purpose whatsoever, without the prior written consent of NQBPP.



**PORT OF HAY POINT**  
**PORT DUST MONITORING LOCATIONS**

8/20/2013 09:10:00:11

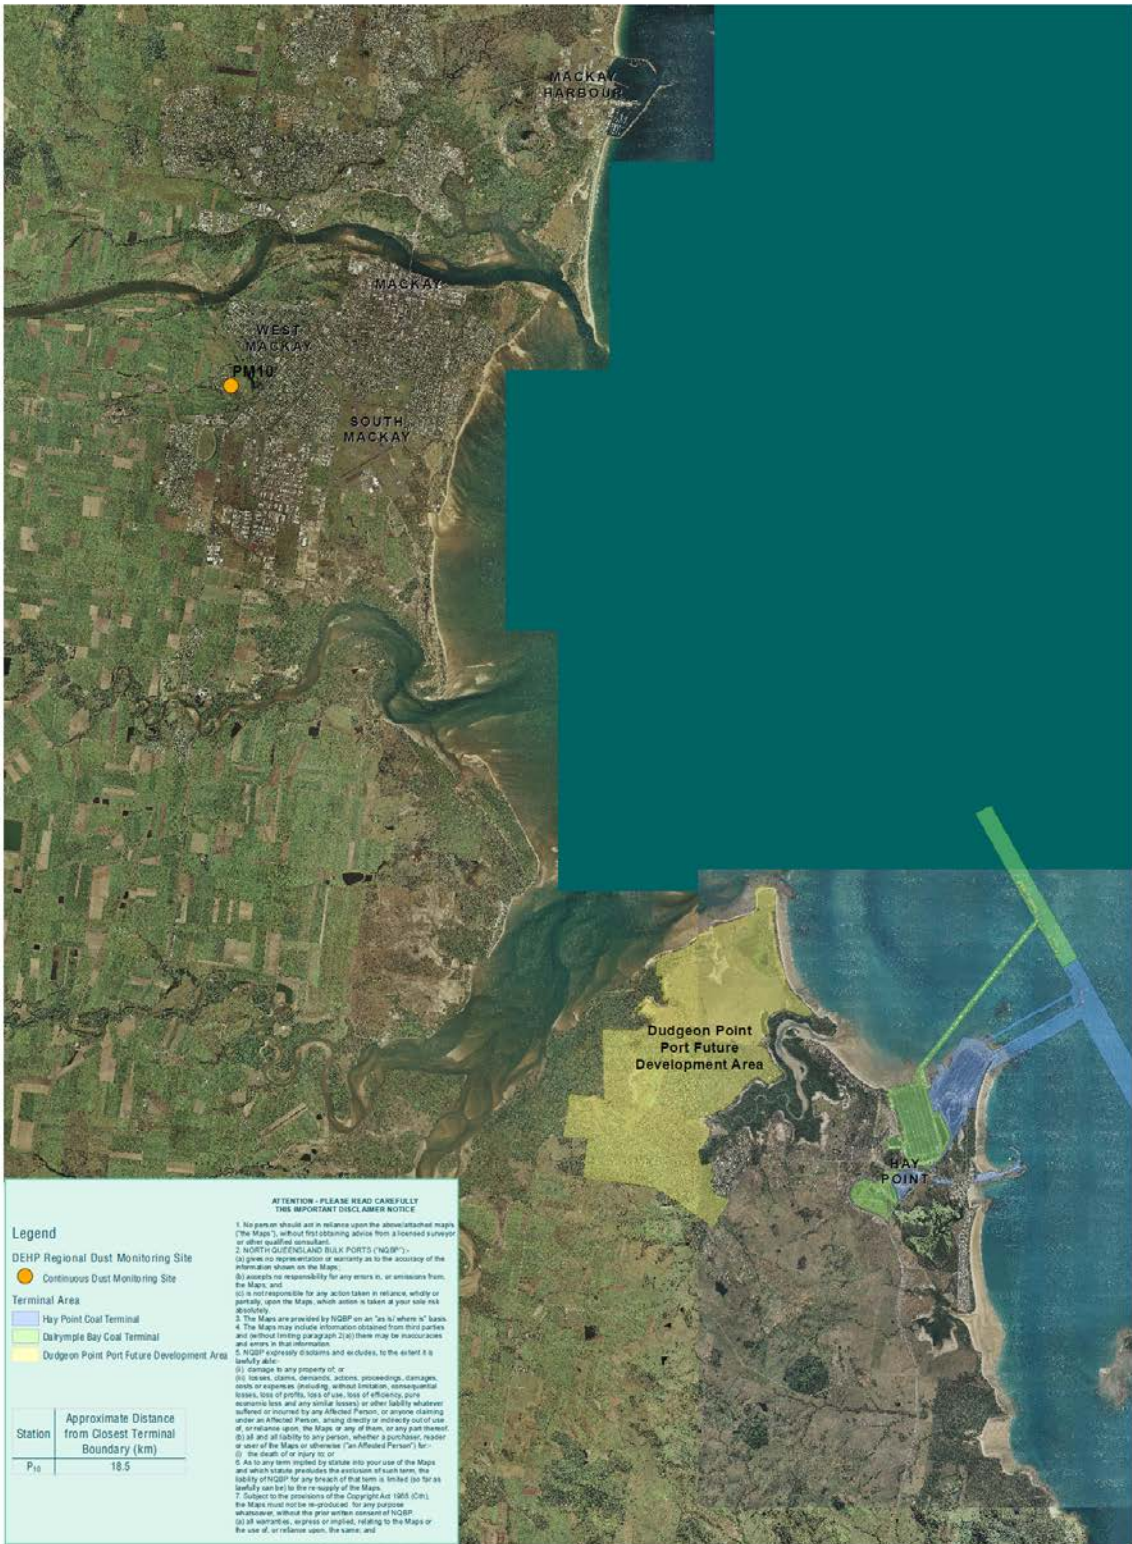

PORT OF HAY POINT  
DEHP REGIONAL DUST MONITORING LOCATION

NQB P2513.0-06a 19/06/2013

# SENATE INQUIRY

## IMPACTS ON HEALTH OF AIR QUALITY IN AUSTRALIA


### Response from North Queensland Bulk Ports Corporation (NQBP) to a Question on Notice

Question from Senator Waters (p43 of Hansard of 11 June 2013): “Could you take on notice the cost of spraying the stockpiles with veneer from the outset, as soon as they arrive, and any work you have done to establish that? Could you compare that with the cost of your current practices?”

#### NQBP Response:

Effective dust control cannot be achieved through a single method. Potential dust generation from the two terminals in the Port of Hay Point is managed through a combination of dust controls. The controls used include equipment design, wind barriers, dust containment and dust suppression. Dust suppression techniques include the use of moisture control throughout the coal chain (from mine to ship) and chemical veneers.

Moisture control is one of the key techniques used to minimise dust from coal in either transit or in storage. Each coal type has an optimum moisture content where dust generation is minimised, which is called the DEM (Dust Extinction Moisture Level). The DEM of each coal is determined in the laboratory using methods in the Australian Standard AS 4156.6 – 2000. A typical plot of dust level versus moisture is provided below.

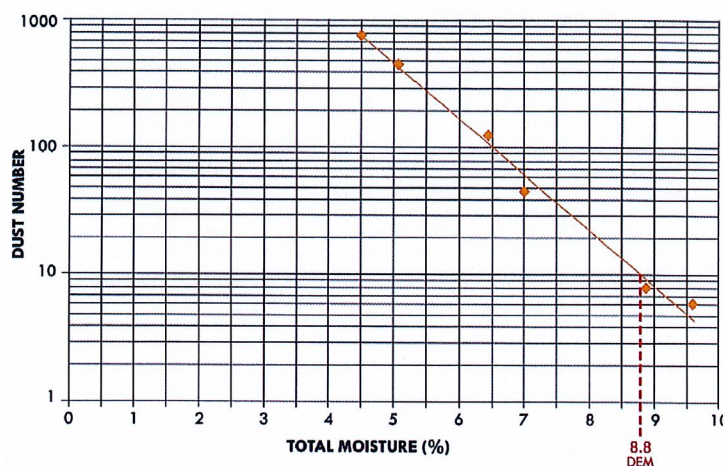

Source: Australian Standard AS 4156.6-2000

Chemical veneering of coal in open rail wagons is being steadily implemented for the coal travelling by rail from Bowen Basin mines to the Port of Hay Point.

Chemical veneering is already used as a surface treatment for coal stored in stockpiles in the coal terminal stockyards in the Port of Hay Point. The product is mixed with water and sprayed on to the surface of the stockpile to form a crust. As soon as the surface is disturbed, the veneer needs to be reapplied. The product used in the port is a commercially available dust suppressant that is a biodegradable product based on natural gum. The material has been tested in laboratory conditions and in the field to prove it is effective as a complementary technique to moisture control.

The product needs to be applied to the surface of coal to form a crust – it cannot be applied to coal when coal arrives at a coal terminal because the coal is in motion from the point of unloading coal from wagons and there is no opportunity to form a crust over a stationary surface until the coal reaches the stockyard area.

The optimum dosage rate for dust suppression has been determined in conjunction with the chemical supplier through laboratory testing and field assessment.

Current practice in the Port of Hay Point, which has been determined to be the most cost-effective in reducing stockyard emissions, is to apply the veneer to coal stockpiles in high wind conditions only. It is also applied only to stockpiles that are not being actively stacked or reclaimed (estimated at a fifth of the stockyard), because the crust formed over the stockpile is broken by these activities. Where it is applied, it applied on average once per week to a stockpile (the crust is retained in place if not disturbed).

The Port of Hay Point exported 82.8 million tonnes of coal in 2011/12. Typical annual cost of application of the veneer based on applying to stockpiles using the above current practices for this annual throughput has been estimated at around \$250,000 per year including the cost of the operator and water truck used to apply it.

If the chemical was applied each day to all coal handled as it is put into a stockpile, with the application being independent of the wind conditions and stockpile use, the cost for the same port throughput would increase significantly, estimated to increase to around \$2 million per year. This additional veneer use would not be expected to measurably reduce terminal dust emissions.

## **References**

Australian Standards, 2000. "AS 4156.6- 2000. Coal Preparation Part 6: Determination of Dust/Moisture Relationship for Coal"

Prepared by R. Brunner, General Manager Planning – Hay Point  
B.E. (Chem), M. Eng. St, M.Sc. Env. Man.